


DIGITAL DEPTH GAUGE

60mm

- Easy operation with three press buttons.
- Auto shut-off in 5 minutes.

Example steps to create a 10mm x 10mm rebate.

1.




3.




- Digital read out in mm, inches and fractions.
- Includes CR2032 3v Lithium battery.

2.

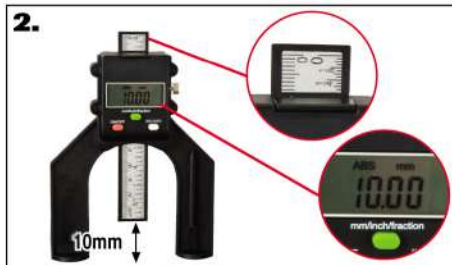

4.

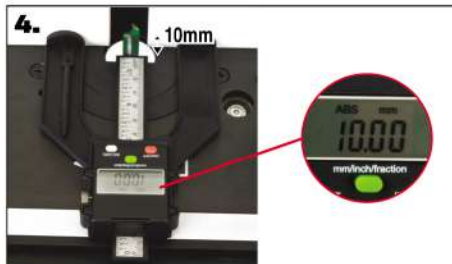

TECHNICAL DATA

Measuring Range: 0 - 80mm (0 - 3 1/8") Hole Depth: 0 - 50.8mm (0 - 2")
 Working Temperature: 0°C - +50°C Working Humidity: <85%RH
 Working Current: <100uA Resolution: 0.05mm (0.002")
 Accuracy: 0.1mm (0.004") Repeatability: 0.1mm (0.004")
 Max Speed: 1.5m/s (60in/s) Battery: CR2032 3V Lithium Battery
 Power Life: 1500 hrs Protection Level: IP50
 Shipping & Storage Temperature: 10°C to +70°C EMC Level: 2
 Weight: 92g Opening width: 60mm (2 3/8")



IMPORTANT

Please fit batteries carefully.
 Please do not tilt or twist
 battery container when
 removing or refitting the rule.

TROUBLE SHOOTING

Problem	Possible Cause	Solution
No display or ambiguous reading.	Lower voltage, no battery or incorrect installation of battery.	Reinstall battery or replace battery.
Flashing number	Low voltage	Replace battery.
Number skip or frozen display.	Internal error.	Remove battery, wait one minute and replace.
Frozen display and buttons not working.	One of the buttons may be stuck.	Release stuck button by gently sliding up or down slightly.

MINI DIGITAL HEIGHT GAUGE

- Horizontal & vertical measuring.
- Hole depth measuring 50.8mm.
- Self standing for setting cutter depth on routers tables and low profile for backfence adjustment.
- Measuring rule with metric/imperial scale and locking screw.
- Digital display for easy reading, with readout accuracy to 0.1mm.
- 60mm wide aperture.
- Magnets in base.

